

QuickSpecs


HPE ProLiant DL560 Gen8

Overview

HPE ProLiant DL560 Gen8


The HPE ProLiant DL560 Gen8 redefines density-optimized 4-socket rack server technology without compromising on performance, scalability, and expandability. Supporting the new high-density and cost effective Intel® Xeon® E5-4600v2 processors, the DL560 Gen8 is ideal for virtualization, database, business processing, and general 4P data-intensive applications where optimization of data center space and price/performance is paramount.

The server is packed with the latest Hewlett Packard Enterprise innovative and intuitive hardware and software features. Hardware enhancements include the HPE SmartDrive carriers, HPE Smart Socket guide, HPE SmartMemory, FlexibleLOM technology, "3D Sea of Sensors", the new embedded Smart Array P420i RAID controller, and more. Software enhancements include HPE Integrated Lifecycle Automation, Dynamic Workload Acceleration, Automated Energy Optimization, Intelligent Provisioning, agentless hardware monitoring, and Active Health System.

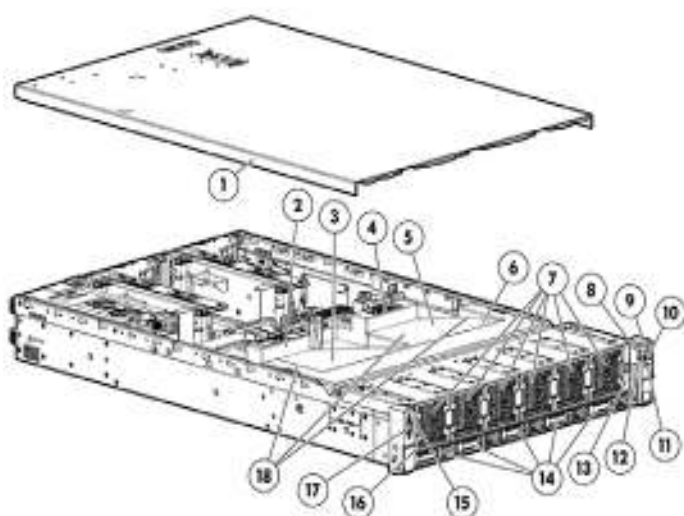

Front View:

1. Quick removal access panel
2. First Processor
3. Second Processor
4. Third Processor
5. Fourth Processor
6. Air Baffle
7. Hot-plug fans, full N+1 redundancy
8. Health LED
9. Power On /Standby button and system power LED button
10. USB connector
11. Unit ID LED
12. Aggregate Network LED
13. Systems Insight Display
14. Drive Bays
15. Access Tag
16. USB connector

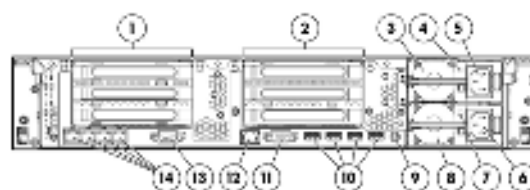

Rear View:

1. PCIe 3.0 Slots 1, 2, PCIe 2.0 Slot 3-top to bottom
2. PCIe 3.0 Slots 4-6 top to bottom
3. Power supply 1
4. Power supply 1 Power LED
5. Power supply 1 Power connection (with Intelligent PDU communication)
6. Power supply 2 Power connection (with Intelligent PDU communication)
7. Power supply 2 Power LED
8. Power supply 2
9. Unit ID LED/Button
10. USB connectors (4)
11. Video connector
12. iLO connector
13. Serial connector
14. FlexibleLOM ports (Shown: 4 ports 1Gb each /Optional: 2 ports 10Gb each)

Overview

- 17. Video connector
 - 18. 48 DIMM slots: DDR3 Registered (RDIMM) or Load Reduced (LRDIMM)
-

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor

One or more of the following depending on model

E5-4600 v2 series Processors

Twelve-Core Processors

Intel® Xeon® E5-4657L v2 (2.4GHz/12-core/30MB/115W) Processor

Ten-Core Processors

Intel® Xeon® E5-4650 v2 (2.4GHz/10-core/25MB/95W) Processor

Intel® Xeon® E5-4640 v2 (2.2GHz/10-core/20MB/95W) Processor

Eight-Core Processors

Intel® Xeon® E5-4627 v2 (3.3GHz/8-core/16MB/130W) Processor

Intel® Xeon® E5-4620 v2 (2.6GHz/8-core/20MB/95W) Processor

Intel® Xeon® E5-4610 v2 (2.3GHz/8-core/16MB/95W) Processor

Six-Core Processors

Intel® Xeon® E5-4607 v2 (2.6GHz/6-core/15MB/95W) Processor

Four-Core Processors

Intel® Xeon® E5-4603 v2 (2.2GHz/4-core/10MB/95W) Processor

E5-4600 series Processors

Eight-Core Processors

Intel® Xeon® E5-4650 (2.7GHz/8-core/20MB/130W) Processor

Intel® Xeon® E5-4650L (2.6GHz/8-core/20MB/115W) Processor

Intel® Xeon® E5-4640 (2.4GHz/8-core/20MB/95W) Processor

Intel® Xeon® E5-4620 (2.2GHz/8-core/16MB/95W) Processor

Six-Core Processors

Intel® Xeon® E5-4617 (2.9GHz/6-core/15MB/130W) Processor

Intel® Xeon® E5-4610 (2.4GHz/6-core/15MB/95W) Processor

Intel® Xeon® E5-4607 (2.2GHz/6-core/12MB/95W) Processor

Four-Core Processors

Intel® Xeon® E5-4603 (2.0GHz/4-core/10MB/95W) Processor

Cache Memory

One of the following depending on model

30MB Level3

NOTE: E5-4657L v2 processor

25MB Level3

NOTE: E5-4650 v2 processor

20MB Level3

NOTE: E5-4650, E5-4650L, E5-4640, E5-4640 v2, E5-4620 v2 processors

16MB Level3

NOTE: E5-4620, E5-4610 v2, E5-4627 v2 processors

15MB Level3

NOTE: E5-4617, E5-4610, E5-4607 v2 processors

12MB Level3

NOTE: E5-4607 processor

10MB Level3

NOTE: E5-4603, E5-4603 v2 processors

Standard Features

NOTE: All processor models above list the L3 Cache associated with that particular processor.

Chipset

Intel® C600 Series Chipset
Intel® E5-4600 and E5-4600v2 Processor Family

NOTE: For more information regarding Intel chipsets, please see the following URL:
<http://www.intel.com/products/server/chipsets/>.

Upgradeability

Upgradeable to 4 processors (32 Cores with E5-4600; 48 Cores with E5-4600v2)
NOTE: Processor upgrade available from Intel® Xeon® Processors E5-4600 to E5-4600 v2. Please contact HPE Technology Sales (<http://www.hp.com/support>), your local Hewlett Packard Enterprise Re-seller, or reference the following Customer Advisory: ProLiant Servers-Instructions for Upgrading an HPE ProLiant Gen8 Server from an Intel Xeon Processor E5-4600 to an Intel Xeon Processor E5-4600 v2, regarding critical details before upgrading. An explanation of requirements and limitations are provided.
Up to 48 DIMM slots available for higher Memory capacity
FlexibleLOM connector for 1 Gigabit or 10 Gigabit, QDR and FDR InfiniBand networking options
5SFF Hard drive bays
Optional 3 slot riser (x16, x8, x8), or 2 slot (x16, x16)
NOTE: To take advantage of the additional 3 PCI slot upgrade, the second processor must be installed.
Redundant Power Supply

On System Management Processor

HPE iLO (Firmware: HPE iLO 4)
NOTE: For more information, visit: <http://www.hp.com/go/ilo>

Memory Protection

Data bus ECC Protection
NOTE: Data Bus ECC protection provides automatic correction from a single data bit error and detection of double data error bits. Often called single error correction/double error detection (SEC/DED).
Advanced ECC / SDDC
NOTE: Advanced ECC uses single device data correction (SDDC) to detect and correct single and all multi-bit error that occurs within a single DRAM chip. Both x4 and x8 SDDC are supported (x8 requires lockstep mode).
Online Spare
NOTE: Memory online spare mode (also known as rank spare mode) detects a rank that is degrading and switches operation to the spare rank.
Lock-step mode
NOTE: Memory Lockstep mode is used to correct a single x8 DRAM device failure on a DIMM. The DIMMs in each paired memory channel must have identical Hewlett Packard Enterprise part numbers.
DIMM address/control bus parity protection
NOTE: Address parity protection available on RDIMMs and LRDIMMs detects address bit errors to improve service time and overall service availability.
Failed DIMM isolation
NOTE: Failed DIMM isolation improves the service time thus improving the overall system availability.
Demand and Patrol scrubbing
NOTE: Memory demand and patrol scrubbing prevent accumulation of correctable errors and

Standard Features

reduces the likelihood of unplanned downtime.

Memory thermal control

NOTE: Memory thermal control is used to prevent DIMMs from overheating. Achieved by slowing down the memory access rate per the temperature monitored by DIMM sensor.

Memory mirroring inter-socket

NOTE: Memory mirroring inter-socket stores a copy of memory with dynamic failover in case of failure. Once a DIMM in a mirrored set is detected as failed, the mirror failover uses its mirrored DIMM.

Memory

One of the following depending on model

| | |
|----------------------|---|
| Type | HPE SmartMemory DDR3 Load Reduced (LRDIMM), Registered (RDIMM) |
| DIMM Slots Available | 48 (12 DIMM slots per processor /4 channels per processor/3 DIMMs per channel) |
| Maximum Capacity | (RDIMM) 1.5TB (48x 32GB RDIMM @1600MHz) (LRDIMM) 1.5TB (48x 32GB LRDIMM @ 1866MHz) |

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen8. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen8 servers support RDIMM, UDIMM and LRDIMM.

NOTE: If only one processor is installed, only a quarter the DIMM slots are available. If only two processors are installed, only half the DIMM slots are available.

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 1866MHz, 1600MHz, 1333MHz, or 1066MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr3memory-configurator>

Network Controller

One of the following depending on model

HPE ProLiant Gen8 servers offer a new networking technology - Flexible Network Technology. The HPE ProLiant DL560 Gen8 server offers the customer the choice of 1 Gigabit and/or 10 Gigabit networking solutions. For additional details see the Networking Section of this document.

| | |
|-------------------------|--|
| Entry Models | HPE Ethernet 1Gb 4-port 331FLR Adapter |
| Base Models | HPE Ethernet 1Gb 4-port 331FLR Adapter |
| High Performance Models | HPE Ethernet 1Gb 4-port 331FLR Adapter HPE Ethernet 10Gb 2-port 530FLR-SFP+ Adapter |

Expansion Slots

| Primary Riser (Standard) | Expansion Slots # | Technology | Bus Width** | Connector Width* | Bus Number* | Form Factor | Notes |
|-----------------------------|----------------------|------------|----------------|---------------------|-------------|----------------------------------|---------|
| | 1 | PCIe 3.0 | X16 | X16 | 7 | Full Length, Full Height Slot | Proc 1 |
| | 2 | PCIe 3.0 | X8 | X8 | 10 | Half Length, Full Height Slot | Proc 1 |
| | 3 | PCIe 2.0 | X4 | X8 | 13 | Half Length, Full Height Slot | Chipset |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number

** Indicates the number of physical electrical lanes running to the connector.

NOTE: When populating the second optional riser slot, the second processor must be installed.

NOTE: Up to two 150w PCIe cards are supported, but an additional Power Cord Option is required (PN 669777-B21). See

Standard Features

Option Section below for offering.

| PCIe Riser (Optional 3-slot) | Expansion Slots # | Technology | Bus Width** | Connector Width* | Bus Number* | Form Factor | Notes |
|---------------------------------|-------------------|------------|-------------|------------------|-------------|-------------------------------|--------|
| | 4 | PCIe 3.0 | X16 | X16 | 16 | Full length, full height slot | Proc 2 |
| | 5 | PCIe 3.0 | X8 | X8 | 20 | Half length, full height slot | Proc 2 |
| | 6 | PCIe 3.0 | X8 | X8 | 23 | Half length, full height slot | Proc 2 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number

** Indicates the number of physical electrical lanes running to the connector.

NOTE: When populating the second optional riser slot, the second processor must be installed.

NOTE: Up to two 150w PCIe cards supported, but an additional Power Cord Option is required (669777-B21). See Option Section below for offering

| PCIe Riser (Optional 2-slot) | Expansion Slots # | Technology | Bus Width** | Connector Width* | Bus Number* | Form Factor | Notes |
|---------------------------------|-------------------|------------|-------------|------------------|-------------|-------------------------------|--------|
| | 4 | PCIe 3.0 | X16 | X16 | 16 | Full length, Full height slot | Proc 2 |
| | 5 | PCIe 3.0 | X16 | X16 | 20 | Half Length, Full Height | Proc 2 |

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number

** Indicates the number of physical electrical lanes running to the connector.

HPE Server ROM

HPE ROM (Read Only Memory) is now digitally signed using the HPE Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

The HPE ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (Integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration (using the HPE ROM-Based Setup Utility (RBSU).

NOTE: For further information, please refer to the HPE RBSU (ROM based setup utility) user guide: <http://www.hp.com/support/rbsu>

QuickSpecs

HPE ProLiant DL560 Gen8

Standard Features

| | | | |
|--|--|--|------------|
| Storage Controller One of the following depending on model | Entry Model | HPE Smart Array P420i/ZM (RAID 0/1/1+0) | |
| | Base Model | HPE Smart Array P420i/1GB with FBWC (RAID 0/1/1+0/5/5+0/6/6+0) | |
| | Performance Model | HPE Smart Array P420i/2GB with FBWC (RAID 0/1/1+0/5/5+0/6/6+0) | |
| Internal Storage Devices | Diskette Drive | None | |
| | Optical Drive | None ship standard *Optional: USB DVD-RW available | |
| | Hard Drives | None ship standard | |
| | Drive Bays | Standard: 5SFF drive bays total NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using P/N 666987-B21: HPE SFF Gen8 Hard Drive Blank Kit. These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server. | |
| Maximum Internal Storage | Hot Plug SFF SAS | 10.0TB | 5 x 2.0TB |
| | Hot Plug SFF SAS SSD | 19.2TB | 5 x 3.84T |
| | Hot Plug SFF SATA | 10.0TB | 5 x 2.0TB |
| | Hot Plug SFF SATA SSD | 19.2TB | 5 x 3.84GB |
| Interfaces | Serial | 1 | |
| | Video | 2 (1 front, 1 back) not active simultaneously | |
| | FlexibleLOM Network Ports | Some models come standard with 4 x 1GB ports while others come with 2 x 10GB ports (See HPE Networking section below for more details and options). | |
| | HPE iLO Remote Management Network Port | 1 Gb Dedicated | |
| | Micro SD slot | 1 Internal Secure NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered. | |
| | USB 2.0 Ports | 7 total: 2 front, 4 back, 1 internal | |
| | | | |
| Industry Standard Compliance | ACPI 2.0b Compliant | | |
| | PCIe 3.0 Compliant | | |
| | PXE Support | | |
| | WOL Support | | |
| | Microsoft® Logo certifications | | |
| | USB 2.0 Compliant | | |

| | |
|---------------------------|--|
| Server Power Cords | All Pre-configured servers ship with a high voltage server-to-PDU power cord. |
| | NOTE: HPE ProLiant DL servers no longer ship standard with a 12-foot NEMA 5-15P to C13 power cord that connects to 110V US wall outlets in a home or office. ProLiant DL servers are primarily connected to power distribution units (PDUs) in data center racks and now ship standard with a PDU 6-foot C-14 to C13 power cord (A0K02A). If a user wishes to power a ProLiant DL server using a 110V receptacle (NEMA-15), the 6-foot NEMA 5-15 to C13 power cord must be ordered separately (AF556A). See Power Cords section for Worldwide Power Cord options. |

Standard Features

Power Specifications

To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at URL: <http://www.hp.com/go/proliant-energy-efficient> or <http://www.hp.com/go/hppoweradvisor>.

NOTE: Power Specification and Technical Content for supported power supplies can be found at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111541>

Common Slot Power Supply

The HPE Common Slot (CS) power supplies allow for commonality of power supplies across a wide range of ProLiant and Integrity servers, as well as HPE Storage solutions, and are designed to provide the highest power supply efficiency without degrading system performance. HPE CS power supplies are tested by the Electric Power Research Institute (EPRI) and certified through the ECOS 80 Plus power supply program. HPE CS power supply options provide efficiency ratings of up to 94% (80 Plus Platinum) and are available in up to 1200W power output. All HPE Common Slot power sources are UL, CE Mark Compliant, hot-plug and support redundant configurations.

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same output and efficiency rating. If non-matched power supplies are inserted you will get errors and operation will fail.

HPE CS Platinum Plus power supplies are required when enabling the HPE Intelligent Power Discovery (IPD) solution. IPD is the first technology to create an automated, energy-aware network between IT systems and facilities. This allows your company to reclaim millions of dollars in wasted power capacity and downtime costs across data centers. For more information on the HPE IPD solution, go to <http://www.hp.com/go/ipd>

It is highly recommended that you use the HPE Power Advisor in defining the "Right-Size" power supply for your needs. HPE Power Advisor can be accessed at: <http://www.hp.com/go/hppoweradvisor>

NOTE: The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org.

Redundant Power: Optional (1+1 or n+n redundant) power supplies can be purchased through power supply option kits (see Power Supplies for part numbers).

NOTE: Power Specification and Technical Content for supported power supplies can be found at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111541>

System Fans

6 fans (N+1 redundancy standard)

Required Cabling

For required cabling information, refer to the Hewlett Packard Enterprise Web site at: <http://www.hp.com/servers/dl560-gen8>

Operating Systems and Virtualization Software Support for ProLiant Servers

[Microsoft Windows Server](#)
[Red Hat Enterprise Linux \(RHEL\)](#)
[SUSE Linux Enterprise Server \(SLES\)](#)
[Oracle Solaris](#)
[VMware](#)
[Citrix XenServer](#)

NOTE: For more information on the HPE Certified and Supported ProLiant Servers for OS and

Standard Features

Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page: <http://www.hp.com/support/DL560Gen8>

Graphics

Integrated Matrox G200 video standard

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE iLO 4 On System Management Memory

- 16 MB Flash
- 256 MB DDR 3 with ECC (112 MB after ECC and video)

Form Factor

2U Rack form factor, ships with ball bearing rails and cable management system

NOTE: Gen8 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen8 server.

CAUTION: Hewlett Packard Enterprise recommends that at least two people are used for all rack server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

3.44 (8.74 cm) Height x 17.54" (44.55 cm) Width x 29.5" (74.94 cm) Length

On System Management

HPE iLO Management Engine

HPE iLO Management Engine is a comprehensive set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support. HPE iLO Management Engine comes standard on all HPE ProLiant Gen8 servers. The HPE iLO Management Engine portfolio includes:

- **HPE iLO:** The HPE iLO (Integrated Lights-Out) management processor is the core foundation for the HPE iLO Management Engine
- **HPE Agentless Management:** Provides built in server health monitoring and alerting capability without OS agents, that starts working the moment a power cord and an Ethernet cable are connected.
- **HPE Active Health System:** Always on, continuous monitoring for increased stability and shorter downtimes; 100% configuration history; Health and service alerts and easy export and upload to Service and Support.
- **HPE Intelligent Provisioning:** Lets customers provision and configure a single server without any separate media. No more SmartStart CDs or Smart Update Firmware DVD are needed.
 - To start Intelligent Provisioning:
 - Press the F10 key during the ProLiant Gen8 server boot process (also known as power on self test or POST).
 - Please go to the Intelligent Provisioning website at <http://www.hp.com/go/intelligentprovisioning> for additional information and to view usage videos.

Standard Features

- Use the Service Pack for ProLiant (SPP) at <http://www.hp.com/go/spp> to get firmware and software updates.
- **HPE iLO Mobile App:** Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: www.hp.com/go/ilo/mobileapp

NOTE: For more information, visit: <http://www.hp.com/go/ilo> or HPE iLO Management Engine technologies whitepaper

HPE Insight Management

HPE Service Pack for ProLiant

HPE Service Pack for ProLiant (SPP) and HPE Smart Update Manager (HPE SUM) version 5 provide a new, comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HPE server hardware launches. By enabling firmware to be updated online and integrating firmware and system software updates in one operation HPE SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire BladeSystem enclosures. Further improving system uptime and stability is the fact that Hewlett Packard Enterprise provides 12 months of support on each Service Pack for ProLiant.

The user experience around HPE SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HPE SUM version 5 and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HPE SUM application has been re-written to provide a more straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hpe.com, HPE SUM provides the tools to optimize stability and consistency throughout the company. While HPE SUM and the SPP will recommend the combinations of firmware and system software that Hewlett Packard Enterprise has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.

The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the BladeSystem enclosure components (Onboard Administrator and Virtual Connect). This testing ensures the highest quality as well as providing the input for HPE SUM to deploy updates taking into account all interdependencies, when determining the correct updates and order of update deployment.

NOTE: The Service Pack for ProLiant (which includes HPE SUM 5) can be downloaded from: <http://www.hp.com/go/spp/download>. More information can be found: <http://www.hp.com/go/spp> and <http://www.hp.com/go/hpsum>

HPE StoreVirtual VSA

HPE StoreVirtual VSA allows you to create fully featured shared storage on a VMware vSphere or

Standard Features

Microsoft Hyper-V virtualized server. This server model starting November 2013, includes a limited license for HPE StoreVirtual VSA software with 1TB of capacity. To download the license key and StoreVirtual VSA software, visit <http://www.hp.com/go/unlockVSA>

NOTE: You will need your server serial number in order to complete the registration form.

Fully functional, capacity-based licenses are available in 4TB, 10TB, and 50TB sizes. For more information and access to the 60-day free trial, visit: <http://www.hp.com/go/tryVSA>

Security

Power-on password
Serial interface control
Administrator's password
Trusted Platform Module

NOTE: The HP Trusted Platform Module Option (488069-B21) is the TPM 1.2 version, which is also available with Gen9 servers.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Optional Features

HPE Insight management

| | |
|--|--|
| HPE Insight Control | HPE Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. HPE Insight Control also supports Location and Power Discovery Services to automate many configuration, asset tracking, and power management tasks to speed implementation and prevent downtime. For more information, see http://www.hp.com/go/insightcontrol |
| HPE iLO Advanced HPE Integrated Lights-Out | HPE Insight Control includes one year of 24 x 7 HPE Software Technical Support and Update Service ensuring rapid access to Hewlett Packard Enterprise support staff and proactive delivery of software updates. For more information about this service, see: http://www.hp.com/services/insight |
| HPE Matrix Operating Environment | Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HPE ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: http://www.hp.com/go/iloadvance |
| | The HPE Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business. |
| | The HPE Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HPE CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS). |

NOTE: For more information, visit: <http://www.hp.com/go/matrixoe>

High Performance Clusters

| | |
|--|---|
| HPE Cluster Platforms | HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters |
| HPE HPC Interconnects | High Performance Computing (HPC) interconnect technologies are available for this server as part of the HPE Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by Hewlett Packard Enterprise when integrated within an HPE cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html |
| HPE Insight Cluster Management Utility | HPE Cluster Management Utility (CMU) is an HPE-licensed and HPE-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu |
| HPE HPC Linux Value Pack | HPE HPC Linux Value Pack (Value Pack) is an HPE-licensed and HPE-supported option to HPE Insight CMU, for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes |

Optional Features

the Platform LSF workload scheduler and Platform Application Center, as well as the HPE-MPI parallelization library. **[HPE HPC Linux Value Pack](#)**

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**
Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**
The HPE storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**
The HPE storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**
Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**
With HPE StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.

NOTE: For more information available Storage Software including QuickSpecs, please see: **<http://www.hp.com/go/storage/software>**

HPE Insight Online

HPE Insight Online is a new addition to the HPE Support Center for one stop, secure access to product and Hewlett Packard Enterprise support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HPE Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime. **<http://www.hp.com/go/insightonline>**

HPE Proactive Insight experience

Prevent problems with innovative, automated monitoring tools and proactive services. The HPE Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: **<http://www.hp.com/go/proactiveinsightexperience>**

Factory Express Portfolio for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset

Optional Features

tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>

HPE Simple Configurator

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact the HPE Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>

Service and Support

Service and Support

HPE Technology Services for Industry Standard Servers

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HPE Pointnext operational services

HPE Pointnext operational services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

Recommended HPE Pointnext operational services for your Hewlett Packard Enterprise product

Optimized Care

Supports maintaining servers at optimum performance availability

HPE Proactive Care with 6 hour call-to-repair commitment, three year Care Pack Service

HPE Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to Hewlett Packard Enterprise. This Care Pack Service combines three years' proactive reporting and advice with our highest level reactive coverage and enhanced escalation management, the Hewlett Packard Enterprise 24x7, six hour call-to-repair hardware commitment. Hewlett Packard Enterprise is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. Service includes 24x7 collaborative software support for leading industry standard software running on your HPE ProLiant server.

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa3-8855enw.pdf>

Standard Care

Service recommendation that maintains high level of server availability

HPE Proactive Care with 24x7 coverage, three year Care Pack Service

HPE Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to Hewlett Packard Enterprise. This Care Pack Service combines three years' proactive reporting and advice with our 24x7 coverage and enhanced escalation management, four hour hardware response time and two hour call back for software questions on leading industry standard software running on your HPE ProLiant server. <https://www.hpe.com/h20195/v2/getpdf.aspx/4aa3-8855enw.pdf>

Related Services

HPE ProLiant Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. For more information on Factory Express services for your specific server model please contact your sales representative or go to:

Service and Support

<http://www.hp.com/go/factory-express>.

Data Privacy Services

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware.

<http://www.hp.com/services/dataprivacy>

Additional HPE Pointnext operational services can be found at: <http://www.hp.com/go/cpc>

Get connected to Hewlett Packard Enterprise to improve your support experience

Prevent problems with innovative, automated monitoring tools and proactive services. Combining Proactive Care Services with our remote support technology such as Insight Online provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit:

<http://www.hp.com/go/proactiveinsightexperience>

HPE Support Center

Personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more

<http://www.hp.com/go/hpsc>

The HPE Support Center Mobile App allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Care Pack or Hewlett Packard Enterprise contractual support agreement.

NOTE: HPE Support Center Mobile App is subject to local availability.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

For more information

To learn more on HPE ProLiant servers and HPE BladeSystem servers, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized ServiceOne Channel Partner. Or visit: <http://www.hp.com/services/proliant>

Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HPE SFF Gen8 Hard Drive Blank Kit or P/N 666986-B21: HPE LFF Gen8 Hard Drive Blank Kit.

NOTE: Not all models are available in all regions. Check with your local country Hewlett Packard Enterprise offices for availability.

Entry Models

| | | |
|---|---------------------------|---|
| HP ProLiant DL560 Gen8 E5-4603v2 2P 16GB-R Hot Plug SFF 1200W RPS Server 732024-xx1 | Processor(s) | (2) Intel® Xeon® E5-4603 v2 (2.2GHz/4-core/10MB/6.4GT-s QPI/95W) Processors |
| | Cache Memory | 10MB (1x10MB) Level 3 |
| | Memory | 16GB (2x8GB) PC3L-12800R (DDR3-1600) Registered DIMMS NOTE: Total 48 DIMM slots available with processor upgrade (4P configuration) |
| | Network Controller | HPE Ethernet 1Gb 4-port 331FLR Adapter |
| | Storage Controller | HPE Smart Array P420i/ZM (RAID 0/1/1+0) |
| | Hard Drives | None ship standard |
| | Internal Storage | Standard: 5 SFF SAS HDD Bays; includes 3 SFF hard drive blanks |
| | Optical Drive Bay | Optional External USB Optical Drive (Mobile USB DVDRW Optical Drive) |
| | PCI-Express Slots | 3 PCIe slots (Up to 3 additional PCIe slots available with optional riser) |
| | Power Supply | (1) HPE 1200W Common Slot Platinum Plus Hot Plug Power Supply (94% Efficient) |
| | Fans | (6) (N+1 redundancy standard) |
| | Management | HPE iLO Management Engine (standard) Optional: HPE iLO Advanced or HPE Insight Control |
| | Form Factor | Rack (2U), HPE Ball Bearing Rail Kit/Cable Management Arm Standard |
| | Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

Base Models

| | | |
|---|---------------------------|---|
| HP ProLiant DL560 Gen8 E5-4610v2 2P 32GB-R Hot Plug SFF 1200W RPS Server 732341-xx1 | Processor(s) | (2) Intel® Xeon® E5-4610 v2 (2.3GHz/8-core/16MB/7.2GT-s QPI/95W) Processors |
| | Cache Memory | 16MB (1x16MB) Level 3 |
| | Memory | 32GB (4x8GB) PC3L-12800R (DDR3-1600) Registered DIMMS NOTE: Total 48 DIMM slots available with processor upgrade (4P configuration) |
| | Network Controller | HPE Ethernet 1Gb 4-port 331FLR Adapter |

Pre-configured Models

| | |
|---------------------------|---|
| Storage Controller | HPE Smart Array P420i/1GB FBWC (RAID 0/1/1+0/5/5+0/6/6+0) |
| Hard Drives | None ship standard |
| Internal Storage | Standard: 5 SFF SAS HDD Bays; includes 3 SFF hard drive blanks |
| Optical Drive | Optional External USB Optical Drive (Mobile USB DVDRW Optical Drive) |
| PCI-Express Slots | 3 PCIe slots (Up to 3 additional PCIe slots available with optional riser) |
| Power Supply | (2) HPE 1200W CS Platinum Plus Hot Plug Power Supply (94% Efficient) |
| Fans | (6) (N+1 redundancy standard) |
| Management | HPE iLO Management Engine (standard) Optional: HPE iLO Advanced or HPE Insight Control |
| Form Factor | Rack (2U), HPE Ball Bearing Rail Kit /Cable Management Arm standard |
| Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

Performance Models

NOTE: These Models are Energy Star Certified.

| | | |
|---|---------------------------|--|
| HP ProLiant DL560 Gen8 E5-4640v2 4P 128GB-R Hot Plug SFF 1200W RPS Server 732342-xx1 | Processor(s) | (4) Intel® Xeon® E5-4640 v2 (2.2GHz/10-core/20MB/8.0GT-s QPI/95W) Processors |
| | Cache Memory | 20MB (1x20MB) Level 3 |
| | Memory | 128GB (16x8GB) PC3-14900R (DDR3-1866) Registered DIMMS NOTE: Total 48 DIMM slots available with processor upgrade (4P configuration) |
| | Network Controller | HPE FlexFabric 10Gb 2-port 533FLR-T Adapter |
| | Storage Controller | HPE Smart Array P420i/2GB FBWC (RAID 0/1/1+0/5/5+0/6/6+0) |
| | Hard Drives | None ship standard |
| | Internal Storage | Standard: 5 SFF SAS HDD Bays; includes 3 SFF hard drive blanks |
| | Optical Drive Bay | Optional External USB Optical Drive (Mobile USB DVDRW Optical Drive) |
| | PCI-Express Slots | 6 PCIe slots (secondary riser included by default) |
| | Power Supply | (2) HPE 1200W CS Platinum Plus Hot Plug Power Supplies (94% Efficient) |
| | Fans | (6) (N+1 redundancy standard) |
| | Management | HPE iLO Management Engine (standard) HPE Insight Control Standard |
| | Energy Star | Meets Energy Star requirements |
| | Form Factor | Rack (2U), HPE Ball Bearing Rail Kit /Cable Management Arm standard |
| | Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

| | | |
|-------------------------|---------|--------|
| Country Code Key | xx = 00 | US |
| | xx = 20 | Brazil |
| | xx = 29 | Japan |
| | xx = 37 | APD |
| | xx = 42 | Europe |
| | xx = AA | PRC |

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Factory Integrated Models must start with a CTO Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

Step 1: Base Configuration (choose one of the following configurable models)

HPE Models

HP ProLiant DL560 Gen8 Configure-to-order Server

686792-B21

Factory Integrated Models ship with:

4 x HPE Smart Socket Guides for fast processor installation.
48 DIMM slots for RDIMM and LRDIMM Memory installation
1 FlexibleLOM connector: (see Step2: HPE Flexible NIC section below for NIC choices to populate the embedded connector)
Smart Array P420i Controller w/ Zero Memory (ZM)
I/O slots - 3 Slots come standard:

- Slot 1 - FL/FH x16 PCIe 3.0 (x16 connector)
- Slot 2 - HL/FH x8 PCIe 3.0 (x8 connector)
- Slot 3 - HL/FH x4 PCIe 2.0 (x8 connector)
- Additional Slots may be added via selections from the PCI Information and Options subsection

(1) HPE 1200W CS Platinum Plus Hot Plug Power Supply (94% Efficient)

System Fans - 6 (N + 1 redundancy standard)

Drive Cage - 5SFF (Optical media drive optional)

USB - 4 Rear, 2 Front, 1 Internal, 1 Micro SD slot

HPE iLO Management Engine (standard)

HPE Ball Bearing Rail Kit and Cable Management Arm

NOTE: Gen8 rail kits have changed significantly from prior generation rail kits.

Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen8 server.

CAUTION: Hewlett Packard Enterprise recommends that at least two people are used for all rack server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors

NOTE: All processors within the server must be identical.

NOTE: All processor kits contain one processor. If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21. If four processors are desired, select one xxxxxx-L21 and three xxxxxx-B21. 3P configurations are not supported.

NOTE: Intel® Hyper Threading supported on all processors except E5-4617 and E5-4627 v2.

E5-4600 v2 series Processors

Twelve-Core Processors

Configuration Information - Factory Integrated Models

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4657Lv2 (2.4GHz/12-core/30MB/115W) FIO Processor Kit | 734193-L21 |
|--|------------|

Ten-Core Processors

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4650v2 (2.4GHz/10-core/25MB/95W) FIO Processor Kit | 734180-L21 |
|--|------------|

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4640v2 (2.2GHz/10-core/20MB/95W) FIO Processor Kit | 734182-L21 |
|--|------------|

Eight-Core Processors

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4620v2 (2.6GHz/8-core/20MB/95W) FIO Processor Kit | 734185-L21 |
|---|------------|

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4610v2 (2.3GHz/8-core/16MB/95W) FIO Processor Kit | 734187-L21 |
|---|------------|

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4627v2 (3.3GHz/8-core/16MB/130W) FIO Processor Kit | 734195-L21 |
|--|------------|

Six-Core Processors

| | |
|--|------------|
| HPE DL560 Gen8 Intel Xeon E5-4607v2 (2.6GHz/6-core/15MB/95W) FIO Processor Kit | 734189-L21 |
|--|------------|

Four-Core Processors

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4603v2 (2.2GHz/4-core/10MB/95W) FIO Processor Kit | 734191-L21 |
|---|------------|

E5-4600 series Processors

Eight-Core Processors

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4650L (2.6GHz/8-core/20MB/115W) FIO Processor Kit | 686832-L21 |
|---|------------|

HPE Memory

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen8. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen8 servers support RDIMM, UDIMM and LRDIMM.

Registered DIMMs (RDIMMs) - E5-4600 v2 series Processors

| | |
|---|------------|
| HPE 8GB (1x8GB) Single Rank x4 PC3L-12800R (DDR3-1600) Registered CAS-11 Low Voltage Memory Kit | 731765-B21 |
|---|------------|

Configuration Information - Factory Integrated Models

HPE 8GB (1x8GB) Single Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit 731761-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3L-12800R (DDR3-1600) Registered CAS-11 Low Voltage Memory Kit 713985-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit 708641-B21

Load Reduced DIMMs (LRDIMM) - E5-4600 v2 series Processors

HPE 32GB (1x32GB) Quad Rank x4 PC3-14900L (DDR3-1866) Load Reduced CAS-13 Memory Kit 708643-B21

Registered DIMMs (RDIMMs) - E5-2xxx and E5-4xxx series Processors

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Voltage Memory Kit 647893-B21

HPE 4GB (1x4GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit 647895-B21

HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 647897-B21

HPE 8GB (1x8GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit 647899-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 647901-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3-12800R (DDR3-1600) Registered CAS-11 Memory Kit 672631-B21

Load Reduced DIMMs (LRDIMM) - E5 2xxx and E5-4xxx series Processors

HP 32GB (1x32GB) Quad Rank x4 PC3L-10600 (DDR3-1333) LRDIMM CAS-9 LP Memory Kit 647903-B21

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <http://www.hp.com/go/ddr3memory-configurator>

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>

NOTE: PC3L is a low voltage memory

HPE Networking

NOTE: The HPE ProLiant DL560 Gen8 server requires one FlexibleLOM to be installed in the FlexibleLOM slot.

FlexibleLOM Adapters

HPE Ethernet 1Gb 4-port 331FLR FIO Adapter 684208-B21

HP Ethernet 10Gb 2-port 530FLR-SFP+ FIO Adapter 684210-B21

Configuration Information - Factory Integrated Models

| | |
|--|------------|
| HP FlexFabric 10Gb 2-port 554FLR-SFP+ FIO Adapter | 684213-B21 |
| HPE FlexFabric 10Gb 2-port 556FLR-SFP+ FIO Adapter | 732456-B21 |

| | |
|--|------------|
| HPE Ethernet 1Gb 4-port 366FLR FIO Adapter | 684217-B21 |
|--|------------|

| | |
|--|------------|
| HPE Ethernet 10Gb 2-port 560FLR-SFP+ FIO Adapter | 684218-B21 |
|--|------------|

| | |
|---|------------|
| HP FlexFabric 10Gb 2-port 526FLR-SFP+ FIO Adapter | 684219-B21 |
|---|------------|

| | |
|--|------------|
| HP Ethernet 10Gb 2-port 561FLR-T FIO Adapter | 700700-B21 |
|--|------------|

| | |
|--|------------|
| HPE FlexFabric 10Gb 2-port 534FLR-SFP+ FIO Adapter | 700752-B21 |
|--|------------|

| | |
|--|------------|
| HP FlexFabric 10Gb 2-port 533FLR-T FIO Adapter | 700760-B21 |
|--|------------|

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

HPE InfiniBand

| | |
|---|------------|
| HPE InfiniBand FDR 2-port 545QSFP Adapter | 702211-B21 |
|---|------------|

| | |
|---|------------|
| HP InfiniBand FDR/Ethernet 10/40Gb 2-port 544QSFP Adapter | 649281-B21 |
|---|------------|

NOTE: For the following two InfiniBand Adapters, only 1 FlexibleLOM can be added to the server, which is selected in Step 2 for the "Configuration Information - Factory Integrated Models" section. These two options are for upgrade or change from original configuration.

| | |
|---|------------|
| HP InfiniBand FDR/Ethernet 10/40Gb 2-port 544FLR-QSFP Adapter | 649282-B21 |
|---|------------|

NOTE: Please see the QuickSpecs for additional information: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>

HPE Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>

HPE Common Slot Platinum Plus Power Supply Kits

NOTE: The following Power Supply offer 94% efficiency with support for Intelligent Power Discovery.

| | |
|---|------------|
| HPE 1200W Common Slot Platinum Plus Hot Plug Power Supply Kit | 656364-B21 |
|---|------------|

NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC cable.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HPE power cords please go to <http://www.hp.com/products/powercords>

NOTE: Power Specification and Technical Content for supported power supplies can be found at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111541>

Step 3: Choose Additional Factory Integratable Options

HPE Insight Software

| | |
|---|--------|
| HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO LTU | C6N36A |
|---|--------|

Configuration Information - Factory Integrated Models

| | |
|---|----------|
| HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO E-LTU | C6N36ABE |
| NOTE:NOTE: The Electronic software license is available in EMEA only. | |

| | | |
|--|--|--------|
| Converged Infrastructure Management Software | HPE OneView with iLO Advanced - Server hardware required on same purchase order | |
| | HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU | E5Y43A |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Processors

NOTE: All processors within the server must be identical.

NOTE: All processor kits contain one processor. If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21. If four processors are desired, select one xxxxxx-L21 and three xxxxxx-B21. 3P configurations are not supported.

NOTE: The processor model as well as the memory configuration determines the maximum speed memory can operate. Please see the "Memory" section later in this document.

NOTE: Intel® Hyper Threading supported on all processors except E5-4617 and E5-4627 v2.

E5-4600 v2 series Processors

Twelve-Core Processors

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4657Lv2 (2.4GHz/12-core/30MB/115W) Processor Kit | 734193-B21 |
|--|------------|

Ten-Core Processors

| | |
|---|------------|
| HPE DL560 Gen8 Intel Xeon E5-4650v2 (2.4GHz/10-core/25MB/95W) Processor Kit | 734180-B21 |
|---|------------|

| | |
|---|------------|
| HPE DL560 Gen8 Intel Xeon E5-4640v2 (2.2GHz/10-core/20MB/95W) Processor Kit | 734182-B21 |
|---|------------|

Eight-Core Processors

| | |
|---|------------|
| HPE DL560p Gen8 Intel Xeon E5-4620v2 (2.6GHz/8-core/20MB/95W) Processor Kit | 734185-B21 |
|---|------------|

| | |
|--|------------|
| HPE DL560 Gen8 Intel Xeon E5-4610v2 (2.3GHz/8-core/16MB/95W) Processor Kit | 734187-B21 |
|--|------------|

| | |
|---|------------|
| HPE DL560 Gen8 Intel Xeon E5-4627v2 (3.3GHz/8-core/16MB/130W) Processor Kit | 734195-B21 |
|---|------------|

Six-Core Processors

| | |
|--|------------|
| HPE DL560 Gen8 Intel Xeon E5-4607v2 (2.6GHz/6-core/15MB/95W) Processor Kit | 734189-B21 |
|--|------------|

| | |
|--|------------|
| HPE DL560 Gen8 Intel Xeon E5-4603v2 (2.2GHz/4-core/10MB/95W) Processor Kit | 734191-B21 |
|--|------------|

Eight-Core Processors

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4650 (2.7GHz/8-core/20MB/130W) Processor Kit | 686843-B21 |
|--|------------|

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4650L (2.6GHz/8-core/20MB/115W) Processor Kit | 686832-B21 |
|---|------------|

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4640 (2.4GHz/8-core/20MB/95W) Processor Kit | 686845-B21 |
|---|------------|

| | |
|---|------------|
| HP DL560 Gen8 Intel Xeon E5-4620 (2.2GHz/8-core/16MB/95W) Processor Kit | 686847-B21 |
|---|------------|

Six-Core Processors

| | |
|--|------------|
| HP DL560 Gen8 Intel Xeon E5-4617 (2.9GHz/6-core/15MB/130W) Processor Kit | 686834-B21 |
|--|------------|

Core Options

HP DL560 Gen8 Intel Xeon E5-4610 (2.4GHz/6-core/15MB/95W) Processor Kit 686822-B21

HP DL560 Gen8 Intel Xeon E5-4607 (2.2GHz/6-core/12MB/95W) Processor Kit 686824-B21

Four-Core Processors

HP DL560 Gen8 Intel Xeon E5-4603 (2.0GHz/4-core/10MB/95W) Processor Kit 686826-B21

NOTE:NOTE: Up to 4 processors supported. Performance Model includes four processors.

HPE Memory

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen8. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen8 servers support RDIMM, UDIMM and LRDIMM.

Registered DIMMs (RDIMMs) - E5-4600 v2 series Processors

HPE 8GB (1x8GB) Single Rank x4 PC3L-12800R (DDR3-1600) Registered CAS-11 Low Voltage Memory Kit 731765-B21

HPE 8GB (1x8GB) Single Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit 731761-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3L-12800R (DDR3-1600) Registered CAS-11 Low Voltage Memory Kit 713985-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit 708641-B21

Load Reduced DIMMs (LRDIMM) - E5-4600 v2 series Processors

HPE 32GB (1x32GB) Quad Rank x4 PC3-14900L (DDR3-1866) Load Reduced CAS-13 Memory Kit 708643-B21

Registered DIMMs (RDIMMs) - E5-2xxx and E5-4xxx series Processors

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Voltage Memory Kit 647893-B21

HPE 4GB (1x4GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit 647895-B21

HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 647897-B21

HPE 8GB (1x8GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit 647899-B21

HPE 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 647901-B21

Core Options

HPE 16GB (1x16GB) Dual Rank x4 PC3-12800R (DDR3-1600) Registered CAS-11 Memory Kit 672631-B21

Load Reduced DIMMs (LRDIMM) - E5-2xxx and E5-4xxx series Processors

HP 32GB (1x32GB) Quad Rank x4 PC3L-10600 (DDR3-1333) LRDIMM CAS-9 LP Memory Kit 647903-B21

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <http://www.hp.com/go/ddr3memory-configurator>

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>

NOTE: PC3L is a low voltage memory.

HPE Optical Drives

HPE Mobile USB Non Leaded System DVD RW Drive 701498-B21
NOTE:NOTE: Included AC adapter not required for DL560 Gen8 functionality.

HPE Hard Drives

NOTE: The HPE ProLiant DL560 Gen8 Smart Storage solutions are equipped with entirely re-designed Small Form Factor (SFF 2.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

12G SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD 759212-B21

HPE 450GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD 759210-B21

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD 759208-B21

6G SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive 718162-B21

HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652589-B21

HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652583-B21

HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652572-B21

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652564-B21

HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652611-B21

Core Options

HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652605-B21

SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives

HPE 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 652749-B21

HPE 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 652745-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111744>

6G SATA 2.5in WI-PLP SC SSD

HPE 1.2TB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804677-B21

HPE 800GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804671-B21

HPE 400GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804665-B21

HPE 200GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804639-B21

6G SATA 2.5in MU-PLP SC SSD

HPE 1.6TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 804631-B21

HPE 800GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 804625-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 832414-B21

HPE 200GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 804613-B21

6G SATA 2.5in RI-PLP SC SSD

HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804605-B21

HPE 800GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804599-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804593-B21

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804587-B21

HPE 120GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804581-B21

HPE 80GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804575-B21

6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives

HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive 739898-B21

6G SATA VE Hot Plug SFF(2.5-inch) SC EV G1 Solid State Drives

HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 756657-B21

Core Options

Solid State Drive

6G SATA VE Hot Plug SFF(2.5-inch) SC EV M1 Solid State Drives

HPE 120GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 764923-B21

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 764925-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 764927-B21

HPE 800GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 764929-B21

6G SATA Hot Plug SFF (2.5-inch) SC MDL Hard Drives

HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD 655710-B21

HPE 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 655708-B21

6G SATA Hot Plug SFF (2.5-inch) SC HDD

HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD 765455-B21

HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD 765453-B21

6G SATA Hot Plug SFF (2.5-inch) RI SC Solid State Drives

HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive 789145-B21

6G SATA Hot Plug MU-3 SFF (2.5-inch) SC Solid State Drives

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 817011-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 816995-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 816985-B21

HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 816975-B21

HPE 120GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 816965-B21

6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816929-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816919-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816909-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816899-B21

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816889-B21

HPE 120GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816879-B21

Core Options

12G SAS ME Hot Plug (SFF (2.5-inch) Enterprise Mainstream Solid State Drives

| | |
|--|------------|
| HPE 200GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 779164-B21 |
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 779168-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 779172-B21 |
| HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 779176-B21 |

12G SAS SFF (2.5in) RI-3 SC Solid State Drives

| | |
|--|------------|
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD | 816576-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD | 816572-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD | 816568-B21 |
| HPE 480GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD | 816562-B21 |

12G SAS SFF (2.5in) MU-3 SC Solid State Drives

| | |
|--|------------|
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD | 822567-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD | 822563-B21 |
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD | 822559-B21 |
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD | 822555-B21 |

12G SAS SFF (2.5-inch) SC HDD

| | |
|--|------------|
| HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e HDD | 791034-B21 |
| HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD | 781518-B21 |
| HPE 900GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD | 785069-B21 |
| HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD | 781516-B21 |
| HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD | 785067-B21 |

12G SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | |
|---|------------|
| HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD | 832514-B21 |
|---|------------|

12G SAS SFF (2.5-inch) SC Solid State Drives

| | |
|--|------------|
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD | 802891-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 802586-B21 |
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 802582-B21 |
| HPE 200GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD | 802578-B21 |

Core Options

12G SAS SFF (2.5-inch) SC HDD

HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD 765466-B21

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD 765464-B21

12G SAS 15K SFF (2.5-inch) SC HDD

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e HDD 748387-B21

12G SAS VE SFF (2.5-inch) SC EV Solid State Drives

HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive 762263-B21

HPE 800GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD 762261-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154378>

Hard Drive Kits

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server.

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

HPE Networking

Gigabit Ethernet Adapters

HPE NC365T 4-port Ethernet Server Adapter 593722-B21

HPE Ethernet 1Gb 4-port 331T Adapter 647594-B21

HPE Ethernet 1Gb 2-port 361T Adapter 652497-B21

HPE Ethernet 1Gb 2-port 332T Adapter 615732-B21

10 Gigabit Ethernet Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

HP NC523SFP 10Gb 2-port Server Adapter 593717-B21

HPE Ethernet 10Gb 2-port 530SFP Adapter 652503-B21

HPE Ethernet 10Gb 2-port 530T Adapter 656596-B21

HP NC552SFP 10Gb 2-port Ethernet Server Adapter 614203-B21

HPE Ethernet 10Gb 2-port 561T Adapter 716591-B21

Core Options

HPE Ethernet 10Gb 2-port 570SFP+ Adapter 718904-B21

HPE Ethernet 10Gb 2-port 560SFP+ Adapter 665249-B21

FlexibleLOM Adapters

HP Ethernet 1Gb 4-port 331FLR Adapter 629135-B21

HPE Ethernet 1Gb 4-port 366FLR Adapter 665240-B21

HPE Ethernet 10Gb 2-port 530FLR-SFP+ Adapter 647581-B21

HP FlexFabric 10Gb 2-port 526FLR-SFP+ Adapter 629138-B21

HPE FlexFabric 10Gb 2-port 533FLR-T Adapter 700759-B21

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter 700751-B21

HP FlexFabric 10Gb 2-port 554FLR-SFP+ Adapter 629142-B21

HPE Ethernet 10Gb 2-port 560FLR-SFP+ Adapter 665243-B21

HPE Ethernet 10Gb 2-port 561FLR-T Adapter 700699-B21

HPE Ethernet 10Gb 2-port 570FLR-SFP+ Adapter 717491-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>

HPE InfiniBand

HPE InfiniBand FDR 2-port 545QSFP Adapter 702211-B21

HP InfiniBand FDR/Ethernet 10/40Gb 2-port 544QSFP Adapter 649281-B21

NOTE: For the following two InfiniBand Adapters, only 1 FlexibleLOM can be added to the server, which is selected in Step 2 for the "Configuration Information - Factory Integrated Models" section. These two options are for upgrade or change from original configuration.

NOTE: FLR Indicates HPE FlexibleLOM Adapter series.

HP InfiniBand FDR/Ethernet 10/40Gb 2-port 544FLR-QSFP Adapter 649282-B21

NOTE: Please see the QuickSpecs for additional information: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>

HPE I/O Expansion Options

HPE DL380p/560 Gen8 3 Slot PCI-E Riser Kit 653206-B21

HPE Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>

HPE Common Slot Platinum Plus Power Supply Kits

NOTE: The following Power Supplies offer 94% efficiency with support for Intelligent Power Discovery

Core Options

HPE 1200W Common Slot Platinum Plus Hot Plug Power Supply Kit 656364-B21

NOTE:NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.

NOTE:NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HPE power cords please go to <http://www.hp.com/products/powercords>

NOTE: Power Specification and Technical Content for supported power supplies can be found at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111541>

HPE Graphic Options

HPE 150W PCI-E Power Cable Kit

669777-B21

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Insight Software

HPE Insight Control

HPE Insight Control including 1yr 24x7 Technical Support and Updates 1-server LTU C6N27A

HPE Insight Control including 1yr 24x7 TSU E-LTU C6N28ABE
NOTE:NOTE: The Electronic software license is available in EMEA only.

HPE Insight Management Media Kit C6N31A

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at:
<http://www.hp.com/go/insightupdates>

NOTE: For additional license options please see the QuickSpecs at:
<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123391>

HPE Integrated Lights-Out (iLO)

HPE Integrated Lights-Out (iLO) Advanced for ProLiant

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU E6U59ABE
NOTE:NOTE: The Electronic software license is available in EMEA only.

HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU E6U64ABE
NOTE:NOTE: The Electronic software license is available in EMEA only.

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU 512485-B21

HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU BD505A

NOTE: For additional license options please see the QuickSpecs at:
<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154343>

NOTE: For more information, visit: <http://www.hp.com/go/ilo>.

Converged Infrastructure Management Software

HPE OneView

HPE OneView with iLO Advanced

HPE OneView Physical Media Kit LTU E5Y37A

HPE OneView including 3yr 24x7 Support Physical 1-server LTU E5Y34A

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU E5Y35AAE

Additional Options

HPE Operations Analytics for HPE OneView LTU K8G29A

HPE Operations Analytics for HPE OneView E-LTU K8G29AAE

HPE OneView without iLO Advanced

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU P8B24A

HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU P8B25A

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU P8B31A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111367>

High Performance Clusters

HPE Cluster Management Utility

HPE Insight Cluster Management Utility 1yr 24x7 Flexible LTU QL803B

HPE Insight Cluster Management Utility 3yr 24x7 Flexible LTU BD476A

NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HPE Insight Cluster Management Utility Media BD477A

HPE Insight Cluster Management Utility for ConvergedSystem 3yr 24x7 Flexible LTU G2E81A

NOTE: For additional license kits please see the QuickSpecs at

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111735>

HPE I/O Accelerator Options

Second Generation Accelerators

HP 1205GB Multi Level Cell G2 PCIe ioDrive2 for ProLiant Servers 673646-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111683>

HPE PCIe Workload Accelerator Options

Value Endurance (HE) PCIe Workload Accelerators

HP 1.3TB HH/HL Value Endurance (VE) PCIe Workload Accelerator 763834-B21

HP 1.6TB HH/HL Value Endurance (VE) PCIe Workload Accelerator 763836-B21

HP 3.2TB HH/HL Value Endurance (VE) PCIe Workload Accelerator 763838-B21

HP 6.4TB FH/HL Value Endurance (VE) PCIe Workload Accelerator 763840-B21

Light Endurance (LE) PCIe Workload Accelerators

HPE 1.0TB HH/HL Light Endurance (LE) PCIe Workload Accelerator 775666-B21

Additional Options

| | |
|--|------------|
| HPE 1.3TB HH/HL Light Endurance (LE) PCIe Workload Accelerator | 775668-B21 |
| HPE 2.6TB HH/HL Light Endurance (LE) PCIe Workload Accelerator | 775670-B21 |
| HPE 5.2TB FH/HL Light Endurance (LE) PCIe Workload Accelerator | 775672-B21 |

Read Intensive (RI) PCIe Workload Accelerators

| | |
|--|------------|
| HPE 1.3TB Read Intensive-2 HH/HL PCIe Workload Accelerator | 831733-B21 |
| HPE 1.6TB Read Intensive-2 HH/HL PCIe Workload Accelerator | 831735-B21 |
| HPE 3.2TB Read Intensive-2 HH/HL PCIe Workload Accelerator | 831737-B21 |
| HPE 6.4TB Read Intensive-2 FH/HL PCIe Workload Accelerator | 831739-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123190>

HPE Security

| | |
|---|------------|
| <p>HPE Trusted Platform Module Option</p> <p>NOTE:NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline.</p> <p>NOTE:NOTE: The HPE Trusted Platform Module Option (488069-B21) is the TPM 1.2 version.</p> <p>NOTE:NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.</p> <p>NOTE:NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.</p> | 488069-B21 |
| HPE 2U Security Bezel Kit | 666988-B21 |

HPE Storage Controllers SAS Controllers

Smart Array P222 Controller

NOTE: P222 requires (1) HPE Mini SAS Straight to Straight Cable Assembly (P/N 696195-B21)

| | |
|--|------------|
| HPE Smart Array P222/512 FBWC 6Gb 1-port Int/1-port Ext SAS Controller | 631667-B21 |
|--|------------|

Smart Array P420 Controller

NOTE: P420 requires (1) HPE Mini SAS Straight to Straight Cable Assembly (P/N 696195-B21)

| | |
|--|------------|
| HPE Smart Array P420/1GB FBWC 6Gb 2-ports Int SAS Controller | 631670-B21 |
|--|------------|

| | |
|--|------------|
| HPE Smart Array P420/2GB FBWC 6Gb 2-ports Int SAS Controller | 631671-B21 |
|--|------------|

Smart Array P421 Controller

| | |
|---|------------|
| HP Smart Array P421/1GB FBWC 6Gb 2-ports Ext SAS Controller | 631673-B21 |
|---|------------|

Additional Options

Smart Array P430 Controller

HPE Smart Array P430/2GB FBWC 12Gb 1-port Int SAS Controller 698529-B21

HPE Smart Array P430/4GB FBWC 12Gb 1-port Int SAS Controller 698530-B21

Smart Array P431 Controller

HPE Smart Array P431/2GB FBWC 12Gb 2-ports Ext SAS Controller 698531-B21

HPE Smart Array P431/4GB FBWC 12Gb 2-ports Ext SAS Controller 698532-B21

Smart Array P830 Controller

HPE Smart Array P830/4GB FBWC 12Gb 2-ports Int SAS Controller 698533-B21

Optional Upgrades

HPE 1GB P-series Smart Array Flash Backed Write Cache 631679-B21

HPE 2GB P-series Smart Array Flash Backed Write Cache 631681-B21

HPE 512MB P-series Smart Array Flash Backed Write Cache 661069-B21

HP Secure Encryption per Svr Entitlement C9A82AAE

HPE Smart Array SR SmartCache (Single Key/Single Server) LTU D7S26A

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU D7S27A

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU D7S27AAE

HPE Cable Options

HP DL560 Mini SAS Straight to Straight Cable Assembly 696195-B21

HP DL38Xp Gen8 25 Small Form Factor (SFF) P430/830 Cable Kit 729274-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111474>

(Smart Array P222 Controller)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111382>

(Smart Array P430 Controller)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111365>

(Smart Array P431 Controller)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111534>

(Smart Array P420 Controller)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111533>

(Smart Array P421 Controller)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04227582>

(Smart Array P830 Controller)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123148>

(SmartCache)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04318075>

(Secure Encryption)

Additional Options

Host Bus Adapter

| | |
|--|------------|
| HP H220 Host Bus Adapter | 650933-B21 |
| HPE H221 PCIe 3.0 SAS Host Bus Adapter | 729552-B21 |
| HPE H222 Host Bus Adapter | 650926-B21 |
| HPE H221 PCIe 3.0 SAS Host Bus Adapter | 729552-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111455>
(HBA 220)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111475>
(HBA 221)

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111514>
(HBA 222)

HPE Power Cords

NOTE: HPE ProLiant servers ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs).

| | |
|---|--------|
| HPE C13 - SEV 1011 CH 250V 10Amp 1.83m Power Cord | AF565A |
| HPE C13 - DK-2.5A DK 250V 10Amp 1.83m Power Cord | AF566A |
| HPE C13 - CEE-VII EU 250V 10Amp 1.83m Power Cord | AF568A |
| HPE C13 - BS-1363A UK/HK/SG 250V 10Amp 1.83m Power Cord | AF570A |
| HPE C13 - CEI-23-50 IT/CL 250V 10Amp 1.83m Power Cord | AF571A |
| HPE C13 - SABS-164 ZA 250V 10Amp 2.5m Power Cord | AF567A |
| HPE C13-NEMA 6-15P 10A/250V 3.6m Black Power Cord | A0N33A |
| HPE C13 - Nema 5-15P US/CA 110V 10Amp 1.83m Power Cord | AF556A |

HPE Disk Backup

NOTE: For the complete range of RDX drives and media see:

<http://www.hp.com/go/rdx>. For hardware and software compatibility of HPE disk backup products see: <http://www.hp.com/storage/SPOCK>

HPE RDX Removable Disk Backup System

| | |
|--|--------|
| HPE RDX 2TB USB3.0 External Disk Backup System | E7X53B |
| HP RDX+ 1TB External Backup System | B7B69B |
| HP RDX+ 500GB External Backup System | B7B66B |
| HPE RDX+ External Docking System | C8S07B |

NOTE: Please see the QuickSpecs for additional part numbers, Technical Specifications, and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111633>

Additional Options

HPE Storage Options

Storage Fibre Channel HBA

NOTE: For the complete listing of Fibre Channel Host Bus Adapters for Windows 2000, Windows Server 2003 and Linux, please see:
<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP 81B 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AP769B

HP 82B 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AP770B

Emulex Fibre Channel HBAs

HPE 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AJ762B

HPE 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ763B

HPE StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter C8R38A

HPE StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter C8R39A

QLogic Fibre Channel HBAs

HPE 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter AK344A

HPE 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter AJ764A

HPE StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter QW971A

HPE StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter QW972A

Converged Network Adapter

HPE StoreFabric CN1200E 10Gb Converged Network Adapter E7Y06A

HP CN1100E Dual Port Converged Network Adapter BK835A

HPE CN1000Q Dual Port Converged Network Adapter BS668A

HPE StoreFabric CN1100R Dual Port Converged Network Adapter QW990A

HPE Uninterruptible Power Systems

HPE Rack-mountable UPS

R1000 Uninterruptible Power System (UPS)

HPE R1500 G4 NA Uninterruptible Power System J2Q99A

HPE R1500 G4 JP/TWN Uninterruptible Power System J2R05A

NOTE: Please see the QuickSpecs for additional information:
<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154376>

HPE R/T2000 Uninterruptible Power System (UPS)

HPE 2U Rack/Tower UPS Shipping Kit L4Q11A

HPE R/T2200 G4 NA/JP Uninterruptible Power System J2R00A

Additional Options

HPE R/T2200 G4 Extended Runtime Module J2R09A

HPE R/T3000 Uninterruptible Power System (UPS)

HPE R/T3000 G4 Extended Runtime Module J2R10A

HPE R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System J2R01A

HPE R/T3000 G4 High Voltage NA/JP Uninterruptible Power System J2R02A

HPE R1500 G4 INTL Uninterruptible Power System J2R03A

HPE R/T3000 G4 High Voltage INTL Uninterruptible Power System J2R04A

NOTE: Please see the QuickSpecs for additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154342>

R5000 Uninterruptible Power System (UPS)

HPE R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System AF461A

HPE R5000 3U L630 High Voltage NA/JP Uninterruptible Power System AF460A

NOTE: Please see the QuickSpecs for additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154372>

R7000 Uninterruptible Power System (UPS)

HPE R7000 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A

HPE R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System AF463A

NOTE: Please see the QuickSpecs for additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154371>

NOTE: For additional information on HPE Uninterruptible Power Systems please go to: <http://www.hp.com/servers/rackups>

NOTE: For additional information on sizing your server, please reference: <http://www.upssizer.com>

NOTE: Please see the UPS and PDU cable matrix's on the HPE Power Protection and Management page. Under Power Cords, click on the "HPE Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: <http://www.hp.com/products/powercords>

HPE Basic Power Distribution Units (PDU)

HPE Basic Power Distribution Unit: 1U/0U Version

HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU H5M54A

HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU H5M56A

HPE Basic Power Distribution Unit: Half Height Version

HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU H5M55A

HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU H5M57A

HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU H5M58A

Additional Options

| | |
|---|--------|
| HPE Basic 7.3kVA/60309 5-wire 32A/230V Outlets (20) C13/Vertical INTL PDU | H5M68A |
| HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU | H5M61A |
| HPE Basic Power Distribution Unit: Mid Height Version | |
| HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU | H5M59A |
| HPE Basic 7.3kVA/60309 3-wire 32A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU | H5M70A |
| HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU | H5M60A |
| HPE Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical INTL PDU | H5M71A |
| HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU | H5M75A |
| HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU | H5M63A |
| HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU | H5M64A |
| HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU | H5M62A |
| HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU | H5M72A |
| HPE Basic Power Distribution Unit: Full Height Version | |
| HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU | H5M73A |
| HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU | H5M67A |
| HPE Basic Power Distribution Unit: 480/277 Volt Version | |
| HPE 800VA - 277V Input / 230V Output NA Rack Mount Transformer | H3X09A |

NOTE: Please see the QuickSpecs for additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111392>

NOTE: Additional HPE Power Distribution Units are available. For a complete list of all HPE PDUs and additional information please visit

<http://www.hp.com/go/rackandpower>

| | | |
|---|---|--------|
| HPE Metered Power Distribution Units (PDU) | HPE Remote Monitored Power Distribution Unit: 1U Version | |
| | HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU | D9N43A |
| | HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU | D9N46A |
| | HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU | D9N44A |
| | HPE Remote Monitored Power Distribution Unit: Half Height Version | |
| | HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU | D9N45A |
| | HPE Remote Monitored Power Distribution Unit: Mid Height Version | |
| | HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU | D9N47A |
| | HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (20) C13 (4) C19/Vertical INTL PDU | D9N48A |
| | HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU | D9N51A |
| | HPE Metered 3Ph 5.7kVA/L21-20P 16A/120-208V Outlets (13) C13 (3) 5-20R/Vertical | D9N52A |

Additional Options

| | |
|--|--------|
| NA/JP PDU | |
| HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU | D9N53A |
| HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (18) C13 (3) C19/Vertical INTL PDU | D9N55A |
| HPE Remote Monitored Power Distribution Unit: Full Height Version | |
| HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU | D9N49A |
| HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlet (32) C13 (4) C19/Vertical INTL PDU | D9N50A |
| HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU | D9N57A |
| HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N58A |
| HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3) C19/Vertical NA/JP PDU | D9N61A |
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3) C19/Vertical NA/JP PDU | D9N54A |
| HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N59A |
| HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU | D9N60A |
| HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlet (30) C13 (3) C19/Vertical INTL PDU | D9N56A |
| HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12) C19/Vertical NA/JP PDU | D9N62A |
| HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF-203P-HP/Vertical NA PDU | D9N63A |
| HPE Environmental Sensor for Remote Monitored PDUs | |
| HP Environmental Sensor for Remote Monitored and Managed PDUs | E2D53A |
| NOTE: Please see the QuickSpecs for additional information: | |
| https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04229509 | |

| HPE Intelligent Power Distribution Unit (PDU) | iPDU Core Units | |
|--|---|--------|
| | HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF520A |
| | HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF521A |
| | HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF522A |
| | HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU | AF533A |
| | HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6) C19/Horizontal NA/JP PDU | AF523A |
| | HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU | AF525A |
| | HPE Intelligent Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU | AF526A |

Additional Options

| | |
|--|--------|
| HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU | AF527A |
| HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU | AF535A |
| HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 30A 5-wire 24A/240V (12) C19/Horizontal NA/JP PDU | AF537A |
| HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C19/Horizontal INTL PDU | AF538A |
| iPDU Kits with Standard Extension Bars | |
| HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU | AF531A |
| HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU | AF532A |
| HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU Kit | AF534A |
| iPDU Extension Bars | |
| HPE 5xC13 Intelligent PDU Extension Bar G2 Kit | AF547A |
| HPE 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar | AF528A |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123329>

NOTE: Additional HPE Power Distribution Units are available. For a complete list of all HPE PDUs and additional information please visit:

<http://www.hp.com/go/rackandpower>

| HPE Rack Series | HPE Intelligent Series Rack | |
|-----------------|---|--------|
| | HP 36U 600mm x 1075mm Enterprise Pallet Rack | BW895A |
| | HP 36U 600mm x 1075mm Enterprise Shock Rack | BW896A |
| | HPE 42U 600mm x 1075mm Enterprise Pallet Rack | BW903A |
| | HP 42U 600mm x 1075mm Enterprise Shock Rack | BW904A |
| | HP 47U 600mm x 1075mm Enterprise Pallet Rack | BW911A |
| | HP 47U 600mm x 1075mm Enterprise Shock Rack | BW912A |
| | NOTE: Please see the QuickSpecs for Technical Specifications such as height, width, depth, weight, and color: https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123237 | |
| | NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower | |

| HPE Rack Options | HPE Location Discovery Services | |
|------------------|---------------------------------|--------|
| | HPE 36U Location Discovery Kit | BW945A |
| | HPE 42U Location Discovery Kit | BW946A |
| | HPE 47U Location Discovery Kit | BW947A |

Additional Options

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/gethtml.aspx?docname=c04123199>

HPE USB Keyboard and Mouse

| | |
|------------------------------------|------------|
| HPE USB US Keyboard/Mouse Kit | 631341-B21 |
| HPE USB UK Keyboard/Mouse Kit | 631344-B21 |
| HPE USB FR Keyboard/Mouse Kit | 631346-B21 |
| HPE USB ES Keyboard/Mouse Kit | 631348-B21 |
| HPE USB DE Keyboard/Mouse Kit | 631358-B21 |
| HPE USB JP Keyboard/Mouse Kit | 631360-B21 |
| HPE USB IT Keyboard/Mouse Kit | 631362-B21 |
| HPE USB CN Keyboard/Mouse Kit | 631364-B21 |
| HPE USB AE Keyboard/Mouse Kit | 638212-B21 |
| HPE USB RU Keyboard/Mouse Kit | 638214-B21 |
| HPE USB AP/INTL Keyboard/Mouse Kit | 672097-373 |
| HPE USB INTL Keyboard/Mouse Kit | 672097-B33 |
| HPE USB PT Keyboard/Mouse Kit | 672097-133 |
| HPE USB TR Keyboard/Mouse Kit | 672097-143 |
| HPE USB CZ Keyboard/Mouse Kit | 672097-223 |
| HPE USB FI Keyboard/Mouse Kit | 672097-353 |
| HPE USB SE Keyboard/Mouse Kit | 672097-103 |
| HPE USB CH Keyboard/Mouse Kit | 672097-113 |
| HPE USB KR Keyboard/Mouse Kit | 672097-KD3 |
| HPE USB IN Keyboard/Mouse Kit | 672097-D63 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04168349>

HPE Server Console Switch G2 with Virtual Media & CAC

| | |
|--|--------|
| HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software | AF618A |
|--|--------|

Additional Options

HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software AF619A
KVM USB Cnsl Itfc Adapter 1PK ALL 336047-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04168373>

HPE IP Console Switch G2 with Virtual Media & CAC

HP 1x4 USB/PS2 KVM Console Switch AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software AF622A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04168374>

HPE USB and SD Options HPE Flash Media Kits for USB Drives

NOTE: Hewlett Packard Enterprise qualified blank USB key for use with HPE ProLiant servers that support the VMware virtualization environment and other Hewlett Packard Enterprise value-add software. Hewlett Packard Enterprise recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HPE VMware Getting Started Guide for installation instructions.

HPE 8GB USB Enterprise Mainstream Flash Media Drive Key Kit 737953-B21

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 8GB microSD Enterprise Mainstream Flash Media Kit 726116-B21

HPE 32GB microSD Mainstream Flash Media Kit 700139-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123175>

HPE Pointnext operational services

Proactive Care

NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience.

HPE 3 year Proactive Care 24x7 ProLiant DL560 Service U6H10E
HPE 3 year Proactive Care 24x7 with DMR ProLiant DL560 Service U6H11E
HPE 3 year Proactive Care Call to Repair ProLiant DL560 Service U6H16E
HPE 3 year Proactive Care Call to Repair 24x7 with DMR ProLiant DL560 Service U6H17E
HPE 3 year Proactive Care 24x7 ProLiant DL560 with Insight Control Service U6H90E
HPE 3 year Proactive Care 24x7 with DMR DL560 with Insight Control Service U6H91E

Additional Options

| | |
|--|--------|
| HPE 3 year Proactive Care Call to Repair ProLiant DL560 with Insight Control Service | U6H92E |
|--|--------|

| | |
|--|--------|
| HPE 3 year Proactive Care Call to Repair 24x7 with DMR DL560 w/Insight Control Service | U6H93E |
|--|--------|

Installation Services

NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.

| | |
|------------------------------------|--------|
| HPE Install ProLiant DL560 Service | U6H58E |
|------------------------------------|--------|

| | |
|------------------------------------|--------|
| HPE Startup ProLiant DL560 Service | U6H60E |
|------------------------------------|--------|

| | |
|---|--------|
| HPE Installation and Startup Non Standard Hours DL560 Service | U6H61E |
|---|--------|

| | |
|--|--------|
| HPE Installation Non Standard Hours ProLiant DL560 Service | U6H59E |
|--|--------|

| | |
|--|--------|
| HPE Installation of ProLiant Add On/In Options Service | UH745E |
|--|--------|

| | |
|--|--------|
| HPE Insight Control Server Custom Deployment Service | U5683E |
|--|--------|

NOTE: For more information, customer/resellers can contact:

<http://www.hp.com/services/carepack>


Memory

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:
<http://www.hp.com/go/ddr3memory-configurator>

Memory Subsystem Architecture

Each Intel® Xeon® E5-4600 family and E5-4600v2 family processor socket contains four memory channels that support three DIMMs each for a total of twelve (12) DIMM per installed processor or a grand total of forty-eight (48) DIMMs for the server. Up to 32GB capacity DIMMs are supported for 1.5TB of memory (48 DIMM slots x 32GB per DIMM).

Memory population guidelines

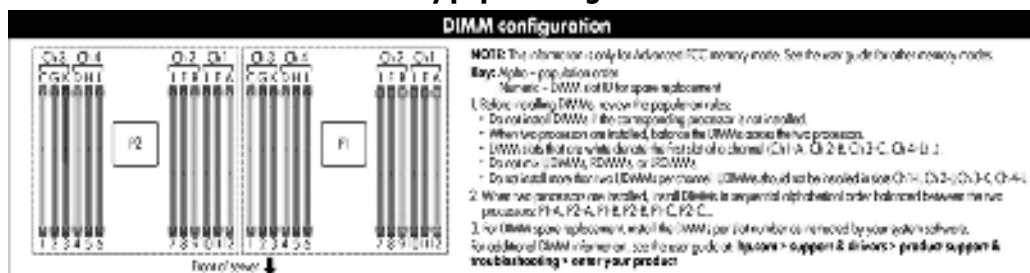

General Memory Population Rules and Guidelines:

- White DIMM slots denote the first slot of a channel. For 1 DPC (DIMM per channel) populate white slots only.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed, only a quarter of the DIMM slots (12) are available. If only two processors are installed, only half of the DIMM slots (24) are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel. Heaviest load (DIMM with most ranks) within a channel goes furthest from the processor
- RDIMMs operating at either 1.35V or 1.5V may be mixed in any order, but the system will power them at the higher voltage.
- Do not mix RDIMMs and LRDIMMs.
- LRDIMMs are supported up to 3 DIMMs per channel.
- Using the HPE RBSU, 1.35V DIMMs can be changed to operate at 1.5V.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not qualified on the DL560 Gen8 Server. Certain HPE SmartMemory features such as memory authentication and enhanced performance may not be supported.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs at:
<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>
- For memory population rules and additional memory guidelines, please see the DL560 Gen8 user guide at
<http://www.hpe.com/support>

| DL560 Gen8 Supported Memory Bandwidth and Capacity on Intel® Xeon® E5-4600 v2 series Processors | | | |
|---|------------------------------|----------------|------------------------------|
| DIMM Type | Registered DIMMS (RDIMMs) | | Load Reduced (LRDIMMs) |
| DIMM Rank | Single Rank (1R) | Dual Rank (2R) | Quad Rank |

QuickSpecs

HPE ProLiant DL560 Gen8

Memory

| | | | | | (4R) |
|---|--------|---------|--------|---------|------|
| DIMM Capacity | 8GB | 8GB | 16GB | 16GB | 32GB |
| DIMM Native Speed (MHz) | 1600 | 1866 | 1600 | 1866 | 1866 |
| Voltage | LV | Std | LV | Std | Std |
| SLOTS THAT CAN BE POPULATED | | | | | |
| 48 slot servers | 48 | 48 | 48 | 48 | 48 |
| MAXIMUM CAPACITY (GB)* | | | | | |
| 48 slot servers | 384 | 384 | 768 | 768 | 1536 |
| POPULATED DIMM SPEED (MHz) | | | | | |
| 1 DIMM Per Channel | 1600 | 1866 | 1600 | 1866 | 1866 |
| 2 DIMM Per Channel | 1600 | 1866 | 1600 | 1866 | 1866 |
| 3 DIMM Per Channel | 800### | 1333### | 800### | 1333### | 1333 |
| NOTES: Memory speed is a function of the processor QPI bus speed. To realize the performance memory capabilities listed above HPE SmartMemory is required. * Maximum capacity will vary based on individual server platform qualification schedule *** LRDIMMs enable 3 DIMMs per channel. HPE SmartMemory will support up to 3DPC@1600 at 1.35V. Third party memory may only support 3DPC @1600 at 1.5V. ## RBSU setting required ### with IVB processor | | | | | |

DL560 Gen8 Supported Memory Bandwidth and Capacity on Intel® Xeon® E5-4600 series

| DIMM Type | Registered DIMMS (RDIMMs) | | | | | | Load Reduced (LRDIMMs) |
|------------------------------------|---------------------------|------|------|----------------|------|------|------------------------|
| DIMM Rank | Single Rank (1R) | | | Dual Rank (2R) | | | Quad Rank (4R) |
| DIMM Capacity | 4GB | 4GB | 8GB | 8GB | 16GB | 16GB | 32GB |
| DIMM Native Speed (MHz) | 1333 | 1600 | 1600 | 1333 | 1333 | 1600 | 1333 |
| Voltage | LV | Std | Std | LV | LV | Std | LV |
| SLOTS THAT CAN BE POPULATED | | | | | | | |
| 48 slot servers | 48 | 48 | 48 | 48 | 48 | 48 | 48 |
| MAXIMUM CAPACITY (GB)* | | | | | | | |
| 48 slot servers | 192 | 192 | 384 | 384 | 768 | 768 | 1536 |
| POPULATED DIMM SPEED (MHz) | | | | | | | |
| 1 DIMM Per Channel | 1333 | 1600 | 1600 | 1333 | 1333 | 1600 | 1333*** |
| 2 DIMM Per Channel | 1333 | 1600 | 1600 | 1333 | 1333 | 1600 | 1333*** |

QuickSpecs

HPE ProLiant DL560 Gen8

Memory

| | | | | | | | |
|--------------------|--------|--------|--------|--------|--------|--------|------|
| 3 DIMM Per Channel | 1066** | 1333## | 1333## | 1066** | 1066** | 1333## | 1066 |
|--------------------|--------|--------|--------|--------|--------|--------|------|

NOTES:

Memory speed is a function of the processor QPI bus speed. To realize the performance memory capabilities listed above HPE SmartMemory is required.

* Maximum capacity will vary based on individual server platform qualification schedule

** For HPE SmartMemory RDIMM supports up to 3DPC@1066 at 1.35V. Third party memory may only support up to 3DPC@1066 at 1.5V.

*** LRDIMMs enable 3 DIMMs per channel. HPE SmartMemory will support up to 3DPC@1066 at 1.35V. Third party memory may only support 3DPC @1066 at 1.5V.

RBSU setting required

Memory Speed by Processor Model

| Intel® Xeon® E5-4600 series v2 Processor Models | Supported Memory Speeds |
|---|----------------------------|
| E5-4650v2, E5-4640v2,, E5-4657Lv2, E5-4627v2 | 1866/1600/1333/1066/800MHz |
| E5-4620v2,E5-4610v2 | 1600/1333/1066/800MHz |
| E5-4607v2, E5-4603v2 | 1333/1066/800MHz |

| Intel® Xeon® E5-4600 series Processor Models | Supported Memory Speeds |
|--|-------------------------|
| E5-4650, E5-4650L, E5-4640, E5-4617 | 1600/1333/1066/800MHz |
| E5-4620, E5-4610 | 1333/1066/800MHz |
| E5-4607, E5-4603 | 1066/800MHz |

Standard and Maximum Memory Capacity (Pre-configured Models)

DL560 Gen8 with Intel® Xeon® E5-4600 v2 series Processors

| Pre Configured Models | Standard Memory | Maximum Memory Plus Optional Memory | Standard Memory Replaced with Optional Memory |
|-----------------------|-----------------|-------------------------------------|---|
| Intel Xeon E5-4640 v2 | 128GB (16x 8GB) | 704GB (32x16GB, 2x8GB) | 1.5TB (48 x 32GB) |
| Intel Xeon E5-4610 v2 | 32GB (4x 8GB) | 736GB (44x16GB, 4x4GB) | 1.5TB (48 x 32GB) |
| Intel Xeon E5-4603 v2 | 16GB (2x 8GB) | 752GB (46x16GB, 1x4GB) | 1.5TB (48 x 32GB) |

| Pre Configured Models | Standard Memory | Maximum Memory Plus Optional Memory | Standard Memory Replaced with Optional Memory |
|-----------------------|-----------------|-------------------------------------|---|
| Intel Xeon E5-4640 | 64GB (8x 8GB) | 704GB (40x16GB, 4x8GB) | 1.5TB (48 x 32GB) |
| Intel Xeon E5-4610 | 32GB (4x 8GB) | 736GB (44x16GB, 4x4GB) | 1.5TB (48 x 32GB) |
| Intel Xeon E5-4603 | 16GB (2x 8GB) | 752GB (46x16GB, 1x4GB) | 1.5TB (48 x 32GB) |

DIMM slot and configuration diagrams

Basic memory slot & population diagram

Population order; start with "A" first, "B" second, "C" third, etc.

When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...

When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A,CPU1-B,CPU2-B,CPU1-C, CP2-C

| 48 DIMM SLOTS (12 per CPU node) | | | | | |
|---------------------------------|---|------------------|--------|------------------|--------|
| | | population order | slot # | population order | |
| Chnl 3 | 1 | C | 1 | C | Chnl 3 |
| | 2 | G | 2 | G | |

Memory

| | | | | | |
|--------|-------------|---|-------------|---|--------|
| | 3 | K | 3 | K | |
| Chnl 4 | 4 | D | 4 | D | Chnl 4 |
| | 5 | H | 5 | H | |
| | 6 | L | 6 | L | |
| | CPU1 | | CPU2 | | |
| Chnl 2 | 7 | J | 7 | J | Chnl 2 |
| | 8 | F | 8 | F | |
| | 9 | B | 9 | B | |
| Chnl 1 | 10 | I | 10 | I | Chnl 1 |
| | 11 | E | 11 | E | |
| | 12 | A | 12 | A | |


| | | | | | |
|--------|-------------|------------------|-------------|------------------|--------|
| | | population order | slot # | population order | |
| Chnl 3 | 1 | C | 1 | C | Chnl 3 |
| | 2 | G | 2 | G | |
| | 3 | K | 3 | K | |
| Chnl 4 | 4 | D | 4 | D | Chnl 4 |
| | 5 | H | 5 | H | |
| | 6 | L | 6 | L | |
| | CPU3 | | CPU4 | | |
| Chnl 2 | 7 | J | 7 | J | Chnl 2 |
| | 8 | F | 8 | F | |
| | 9 | B | 9 | B | |
| Chnl 1 | 10 | I | 10 | I | Chnl 1 |
| | 11 | E | 11 | E | |
| | 12 | A | 12 | A | |

NOTE: Capacity references are rounded to the common Gigabyte values.

- 1GB = 1024MB
- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB
- 16GB = 16384MB
- 32GB = 32768MB

DDR3 memory options part number decoder

Memory

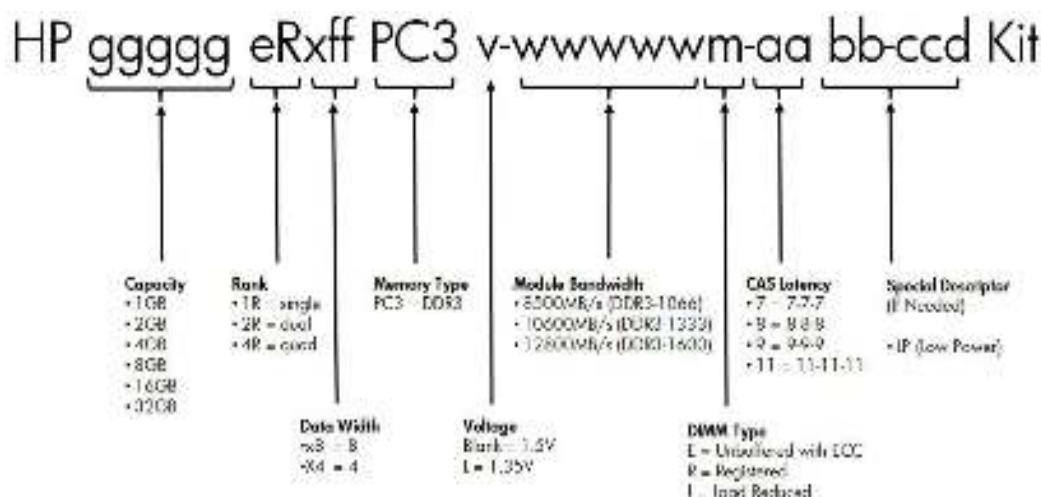

Following are memory options available from HPE:

HPE Memory

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen8. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

NOTE: LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen8 servers support RDIMM, UDIMM and LRDIMM.

Registered DIMMs (RDIMMs) - E5-4600 v2 series Processors

| | |
|---|------------|
| HPE 8GB (1x8GB) Single Rank x4 PC3L-12800R (DDR3-1600) Registered CAS-11 Low Voltage Memory Kit | 731765-B21 |
|---|------------|

| | |
|--|------------|
| HPE 8GB (1x8GB) Single Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit | 731761-B21 |
|--|------------|

| | |
|---|------------|
| HPE 16GB (1x16GB) Dual Rank x4 PC3L-12800R (DDR3-1600) Registered CAS-11 Low Voltage Memory Kit | 713985-B21 |
|---|------------|

| | |
|--|------------|
| HPE 16GB (1x16GB) Dual Rank x4 PC3-14900R (DDR3-1866) Registered CAS-13 Memory Kit | 708641-B21 |
|--|------------|

Load Reduced DIMMs (LRDIMM) - E5-4600 v2 series Processors

| | |
|--|------------|
| HPE 32GB (1x32GB) Quad Rank x4 PC3-14900L (DDR3-1866) Load Reduced CAS-13 Memory Kit | 708643-B21 |
|--|------------|

Registered DIMMs (RDIMM) - E5-2xxx and E5-4xxx series Processors

| | |
|--|------------|
| HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Voltage Memory Kit | 647893-B21 |
|--|------------|

| | |
|---|------------|
| HPE 4GB (1x4GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit | 647895-B21 |
|---|------------|

| | |
|---|------------|
| HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit | 647897-B21 |
|---|------------|

Memory

| | |
|---|------------|
| HPE 8GB (1x8GB) Single Rank x4 PC3-12800 (DDR3-1600) Registered CAS-11 Memory Kit | 647899-B21 |
|---|------------|

| | |
|--|------------|
| HPE 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit | 647901-B21 |
|--|------------|

| | |
|--|------------|
| HPE 16GB (1x16GB) Dual Rank x4 PC3-12800R (DDR3-1600) Registered CAS-11 Memory Kit | 672631-B21 |
|--|------------|

Load Reduced DIMMs (LRDIMM) - E5-2xxx and E5-4xxx series Processors


| | |
|---|------------|
| HP 32GB (1x32GB) Quad Rank x4 PC3L-10600 (DDR3-1333) LRDIMM CAS-9 LP Memory Kit | 647903-B21 |
|---|------------|

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <http://www.hp.com/go/ddr3memory-configurator>

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>

NOTE: PC3L is a low voltage memory.

Storage

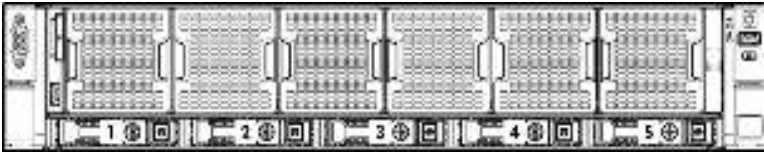

1-5 Five SFF SAS hot plug drive bays

Drive Support

External Storage

| | Quantity Supported | Position Supported | Host Controller or Adapter |
|----------------------|--------------------|--------------------|---------------------------------|
| D2600 Disk Enclosure | Up to 4 | External | HPE Smart Array P222 Controller |
| | Up to 8 | | HPE Smart Array P421 Controller |
| | | | HPE Smart Array P822 Controller |
| D2700 Disk Enclosure | Up to 4 | External | HPE Smart Array P222 Controller |
| | Up to 8 | | HPE Smart Array P421 Controller |
| | | | HPE Smart Array P822 Controller |

Maximum Storage Capacity - (with D2700, SAS HDD)

| | |
|----------|---------------------------------|
| Internal | 6TB (5 SFF HDs x 1.2TB SAS SFF) |
| External | 240TB (200 x 1.2TB SAS SFF) |
| Total | 246TB |

Technical Specifications

| | | | |
|--------------------|--|---|--|
| System Unit | Dimensions (H x W x D) (with bezel) | SFF Drives: 3.44 x 17.54 x 29.50 in (8.73 x 44.55 x 74.93 cm) | |
| | Weight (approximate) | Maximum (all SFF hard drives, power supply, and processor installed) | 61.00 lb (27.66 kg) |
| | Input Requirements (per power supply) | Rated Line Voltage | 100 to 120 VAC 200 to 240 VAC |
| | | Rated Input Current | For 1200 W Power Supply: 10 A (at 100 VAC), 4.9 A (at 200 VAC) |
| | | Rated Input Frequency | 50 to 60 Hz |
| | | Rated Input Power | For 1200 W Power Supply: 930 W (at 100 VAC), 1348 W (at 200 VAC) |
| | BTU Rating | Maximum | For 1200 W Power Supply: 3530 BTU/hr (at 100 VAC), 4600 BTU/hr (at 200 VAC) |
| | Power Supply Output (per power supply) | Rated Steady-State Power | For 1200 W Power Supply: 800 W (at 100 VAC), 900 W (at 120 VAC), 1200 W (at 200 to 240 VAC) |
| | | Maximum Peak Power | For 1200 W Power Supply: 800 W (at 100 VAC), 900 W (at 120 VAC), 1200 W (at 200 to 240 VAC) For 750 W Power Supply: 750 W (at 100 to 120 VAC), 750 W (at 200 to 240 VAC) For 460 W Power Supply: 460 W (at 100 to 120 VAC), 460 W (at 200 to 240 VAC) |
| | System Inlet Temperature | Operating | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). |
| | | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). |
| | Relative Humidity (non-condensing) | Operating | 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing. |
| | | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |
| | Altitude | Operating | 3048 m (10,000 ft). This value may be limited by the type |

Technical Specifications

and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

| | Entry | Base | Performance |
|---------------------------------------|---|--------|-------------|
| Idle | | | |
| L WAd | 4.1 B | 4.1 B | 4.1 B |
| L pAm | 25 dBA | 25 dBA | 25 dBA |
| Operating | | | |
| L WAd | 4.3 B | 4.7 B | 5.0 B |
| L pAm | 27 dBA | 31 dBA | 35 dBA |
| Emissions Classification (EMC) | | | |
| FCC Rating | Class A | | |
| Normative Standards | CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 | | |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

| | | |
|---|---|--|
| HPE Smart Array P420i Controller | Dimensions | Embedded |
| | Disk Drive and Enclosure Interface - Transfer rate | 6Gb/s SAS (Serial Attached SCSI) 6Gb/s SATA (Serial ATA) |
| | SAS Connectors | 2 internal 4X connectors |
| | Cache Memory Speed | 512MB FBWC - DDR3-1333MHz with 40-bit wide bus, 1GB or 2GB FBWC DDR3-1333MHz with 72-bit wide bus |
| | Server Interface | x8 PCIe 3.0 provides 2GB/s maximum bandwidth |
| | SAS Speed | (8) 6Gb/s SAS links provide 4.8GB/s maximum bandwidth |
| | Cache Memory | Zero Memory RAID has no cache memory 40-bit 512MB FBWC 72-bit 1GB FBWC or 72-bit 2GB FBWC |
| | Logical Drives Supported | Zero Memory, Up to 2 logical volumes (5SFF physical drives) Up to 64 logical drives with cache |
| | Host Memory Addressing | 64-bit, supporting greater than 4GB server memory space |

Technical Specifications

| | | | |
|---|---|--|--|
| | RAID Support | RAID 6, 60 (Advanced Data Guarding) RAID 5, 50 (Distributed Data Guarding) NOTE: A minimum of 512 MB cache is required to enable RAID 5, 50, 6, 60 NOTE: HPE Smart Array Advanced Pack (SAAP 2.0) is no longer required to enable RAID 6 & 60 (Advanced Data Guarding). However, controller must be in firmware version 4.68 (or later). RAID 1+0 (Striping & Mirroring) RAID 0 (Striping), RAID 1 (Mirroring) | |
| HPE Ethernet 1Gb 4-port 331FLR Adapter | HPE Flexible Network Technology Network Interface Compatibility Data Transfer Method Chipset Network Transfer Rate Connector Cable Support | HPE Flexible Network Technology consists of replaceable network solutions to meet the customers require now or in the future. 10Base-T/100Base-TX/1000Base-TX EEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX IEEE 802.3ad 1000Base-TX IEEE 802.1p 100Base-TX IEEE 802.1q 100Base-TX PCI Express, four lanes (x4) BCM5719 10Base-T (Half-Duplex) 10 Mb/s 10Base-T (Full-Duplex) 20 Mb/s 100Base-TX (Half-Duplex) 100 Mb/s 100Base-TX (Full-Duplex) 200 Mb/s 1000Base-TX (Half and Full-Duplex) 2000Mb/s Four RJ-45 10Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m) 100Base-TX Category 5 or higher UTP; up to 328 ft (100 m) 1000BaseTX Category 5 or higher UTP; up to 328 ft (100 m) | |
| HPE Ethernet 10Gb 2-port 530FLR-SFP+ Adapter | Network Interface Compatibility Data Transfer Method Chipset | SFP+ for Direct Attach Cable copper or fibre EEE 802.3 SFP+ (SX, SR & LR) IEEE 802.3x IEEE 802.3ad IEEE 802.1q IEEE 802.3x IEEE 802.1au IEEE 802.3ap PCI Express, eight lanes (x8) BCM57810S | |

Technical Specifications

| | | |
|------------------------------|------------------------|---|
| Network Transfer Rate | 10Base-T (Half-Duplex) | 10Gbps |
| | 10Base-T (Full-Duplex) | 1Gbps |
| Connector | Two SFP+ | |
| Cable Support | 10Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) |
| | 100Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) |
| | 1000BaseTX | Category 5 or higher UTP; up to 328 ft (100 m) |

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life HPE product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------------|---------|---|
| 23-Oct-2017 | From Version 37 to 38 | Changed | Care Pack naming and Service and Support- Parts and Materials updated. |
| 31-Mar-2016 | From Version 36 to 37 | Changed | Maximum Internal Storage, Security, and Memory sections were revised. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 16-Feb-2016 | From Version 35 to 36 | Added | Added HPE Infiniband options and HPE PCIe Workload Accelerator options. |
| | | Changed | Additional Options section was revised. |
| | | Removed | Obsolete model were removed from Pre-configured models. Obsolete SKUs were removed from HPE Tape Backup, HPE Disk Storage Systems, and throughout the QuickSpecs. |
| 17-Dec-2015 | From Version 34 to 35 | Added | Smart Buy models were added to the NA version. |
| 01-Dec-2015 | From Version 33 to 34 | Added | New Hard Drives offering was added to HPE Hard Drives section. |
| | | Changed | What's New was updated. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 28-Sep-2015 | From Version 32 to 33 | Added | Added new 6Gb SATA Solid State Drives. Added new HPE OneView management software. |
| | | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 17-Aug-2015 | From Version 31 to 32 | Added | New Solid State Drives offering was added to HPE Hard Drives section. |
| 18-Jun-2015 | From Version 30 to 31 | Changed | Fixed editing faults in the NA version. |
| 01-Jun-2015 | From Version 29 to 30 | Added | New Hard Drives were added to Core Options. |
| | | Removed | Obsolete SKUs were removed from Configuration Information - Factory Integrated Models, Core Options, and Additional Options. |
| 09-Feb-2015 | From Version 28 to 29 | Changed | Core Options, Additional Options and Memory sections were updated |
| | | Added | Skus added on HPE Uninterruptible Power Systems: J2Q99A, J2R00A, J2R01A, J2R02A, J2R03A, J2R04A, J2R05A, J2R09A, J2R10A, and L4Q11A. Skus Added on HPE Hard Drives: 779164-B21, 779168-B21, 779172-B21, 779176-B21, 764923-B21, 764925-B21, 764927-B21, and 764929-B21. |
| | | Removed | Obsolete sku deleted: 653078-B21 |
| 01-Dec-2014 | From Version 27 to 28 | Added | Sku added on Hard Drives: 757339-B21. |
| 01-Nov-2014 | From Version 26 to 27 | Changed | Service and Support section was updated |
| 29-Sep-2014 | From Version 25 to 26 | Changed | Core Option section was updated |
| | | Added | Skus Added on HPE Hard Drives: 756657-B21, 756636-B21, 756621-B21, 756601-B21, 655710-B21, and 655708-B21. |
| | | Removed | Obsolete skus removed: AF902A. |
| 18-Aug-2014 | From Version 24 to 25 | Changed | Overview, Standard Features section were updated |
| | | Added | Skus Added on Hard Drives: 759212-B21, 759210-B21, and 759208-B21. |
| | | Removed | Obsolete skus Deleted from Core Options section: 690829-B21, 690827-B21, 690825-B21, and 653082-B2. |
| 10-Jun-2014 | From Version 21 to 24 | Changed | Standard Features, Service and Support, Configuration Information, Core Options, Additional Options and Memory sections were updated |
| 11-Apr-2014 | From Version 20 to 21 | Changed | Changes were made in the North America and Canada versions only. |
| 31-Mar-2014 | From Version 19 to 20 | Changed | Processors, Memory, Hard Drives, HPE Insight Software, HPE Tape Backup and HPE Disk Backup were revised |
| 19-Feb-2014 | From Version 17 to 19 | Changed | Changes made throughout the QuickSpec. |

Summary of Changes

| | | | |
|-------------|-----------------------|---------|--|
| 13-Dec-2013 | From Version 16 to 17 | Changed | HPE Insight Control including 1yr 24x7 Support ProLiant MI/DL/BL-bundle FIO Electronic License was added to Step 3 in Configuration Information HPE SmartCache and HPE H221 PCIe 3.0 SAS Host Bus Adapter were added to Storage Controllers HPE Tape and Disk Storage Systems were added to Additional Options HPE 1.2TB 6G SAS 10k rpm SFF SC Dual Port Enterprise 3yr Warranty Hard Drive was added and 3G SATA MLC Hot Plug SFF and LFF Enterprise Mainstream Solid State Drives were removed from Hard Drives HPE Basic Power Distribution Units and HPE Remote Monitoring Power Distribution Units were revised in Additional Options HPE Power Distribution Units was removed from Additional Options |
| 11-Oct-2013 | From Version 15 to 16 | Added | Converged Infrastructure Management Software was added HPE 300GB and 600GB SATA Value Endurance SFF SC Enterprise Boot Solid State Drive were added to Hard Drives Mainstream Endurance (ME) PCIe Workload Accelerators were added to HPE PCIe Workload Accelerator Options HPE Disk Backup and HPE Remote Monitoring Power Distribution Units were added to Additional Options HPE 32GB SD Enterprise Mainstream Flash Media Kit was added to HPE USB and SD Options |
| 10-Sep-2013 | From Version 14 to 15 | Changed | Memory, Networking, InfiniBand Options, Hard Drives, HPE PCIe Workload Accelerator Options, Storage Controllers, Storage Options, and Power Distribution Units were revised. |
| 30-Jul-2013 | From Version 13 to 14 | Added | Note was added to Optical Drives in Core Options |
| 13-May-2013 | From Version 12 to 13 | Changed | Changes made in the following sections: Configuration Information - Networking Core Options - HPE Hard Drives Additional Options - HPE Insight Software, HPE Storage Controllers, HPE Power Cords, HPE Tape Backup, HPE Storage Options Added HPE PCIe Workload Accelerator Options and HPE Basic Power Distribution Units |
| 25-Mar-2013 | From Version 11 to 12 | Added | Configuration Information: Added a NOTE to the HPE Power Supplies section. Core Options: Added a NOTE to the HPE Power Supplies section. |
| 27-Feb-2013 | From Version 10 to 11 | Added | Added two new skus to the HPE Networking section within Core Options. |
| 22-Feb-2013 | From Version 9 to 10 | Added | Added the HPE Proactive Insight experience section to Optional Features. |
| 21-Feb-2013 | From Version 8 to 9 | Changed | Change made in Standard Features, Optional Features, Options and Technical Specifications sections. |
| 10-Dec-2012 | From Version 7 to 8 | Removed | Removed HPE Disk Storage Systems |
| | | Changed | Change made in Standard Features, Optional Features, Options and Technical Specifications sections. |
| 24-Sep-2012 | From Version 6 to 7 | Changed | Change made in Standard Features, Optional Features and Technical Specifications sections. |
| 28-Aug-2012 | From Version 5 to 6 | Changed | Changes made in the North America and Canada versions only. |
| 24-Aug-2012 | From Version 4 to 5 | Changed | Changes made in throughout the QuickSpec. |
| 22-Aug-2012 | From Version 3 to 4 | Changed | Changes made in the North America and Canada versions only. |
| 20-Aug-2012 | From Version 2 to 3 | Changed | Fixed the size of Models section image. |
| 14-Aug-2012 | From Version 1 to 2 | Added | Added note to Standard Features section. |

Summary of Changes



Sign up for updates

★ Rate this document

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

Unix is a registered trademark of The Open Group.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c04123206 - 14395 - Worldwide - V38 - 23-October-2017

